

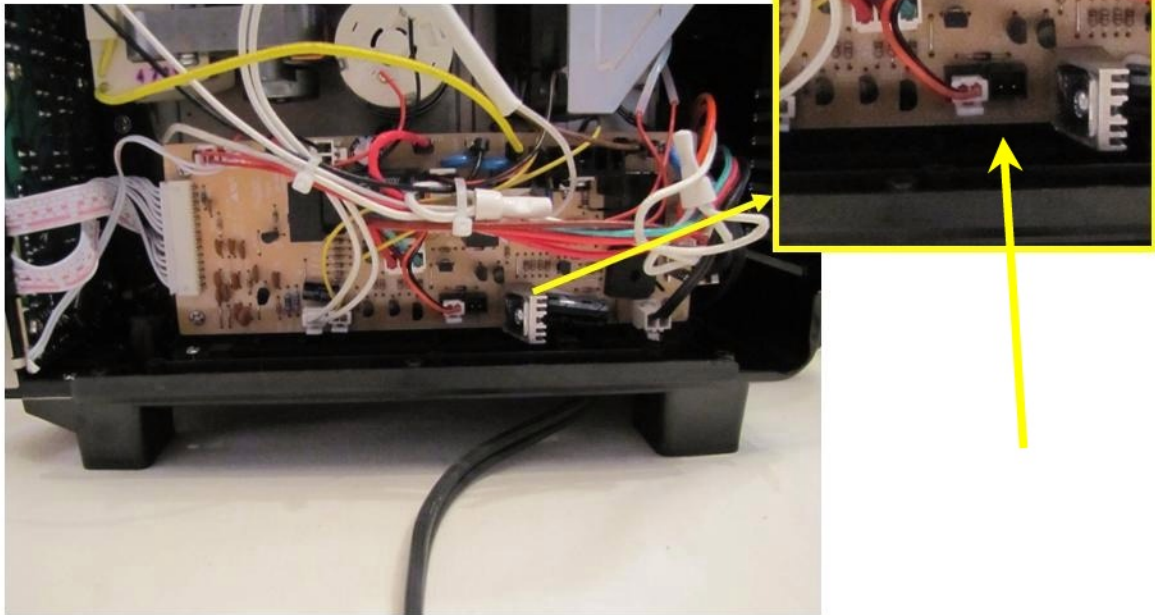


Remove 6 screws (blue arrows), slide panel forward (orange arrow) set panel aside

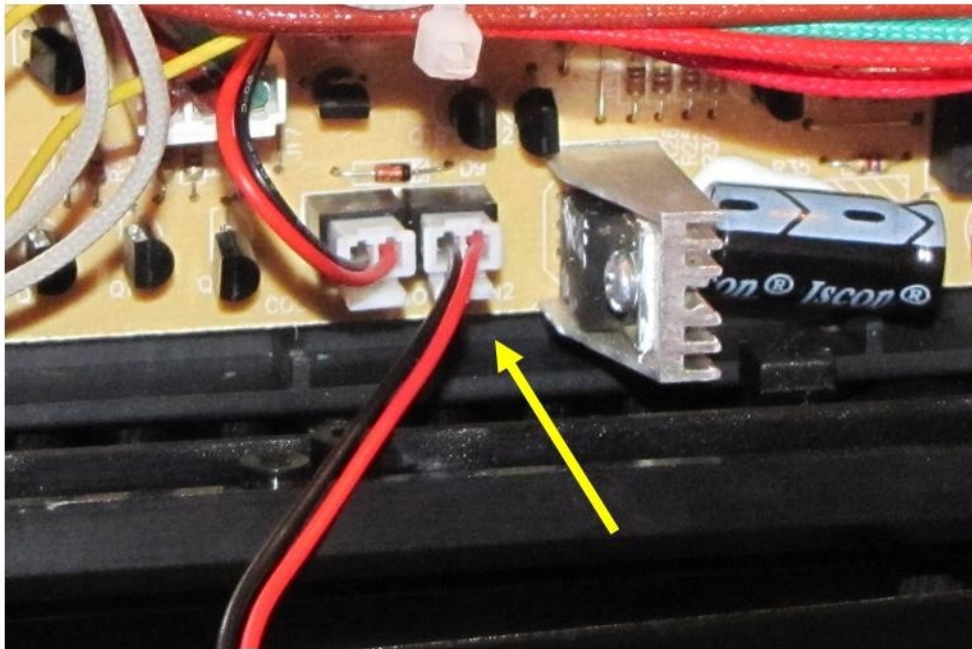

View area in particular blow up yellow box. Two connectors. One is filled the other empty. Empty connector is for the fan connection.

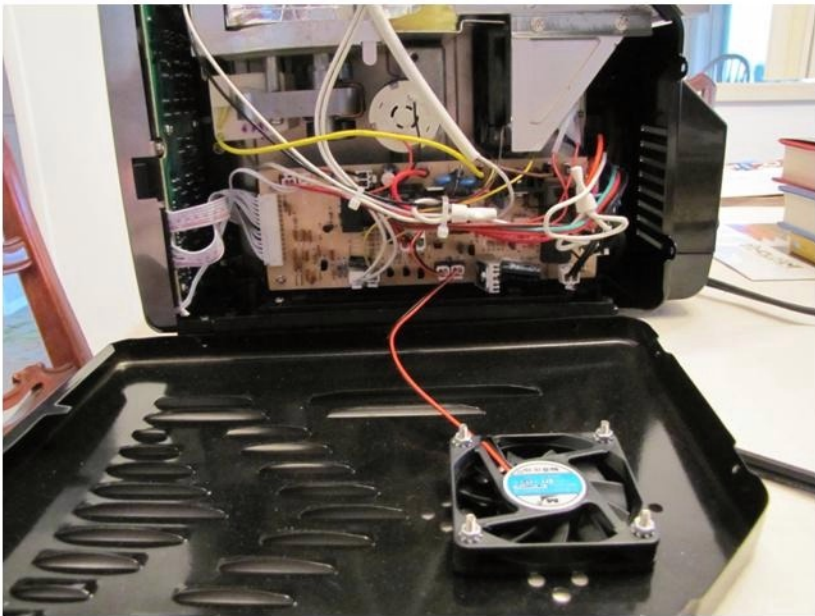

Lay panel flat beside the roaster. Insert male connector into the opening on the PCB (yellow arrow). Note the male connector has a tiny tab. That tab is to be downward as shown. Press Cool for a quick test, then re-assemble by gently lifting the panel and easing it back in place. Then replace the screws.

Remember you've just connected the panel to the PCB, so it is tethered to the roaster- Do not pull .. be gentle